


Super Fortress 70 - Sculpted French Door

Open in French door with 2832 small outer frame (cill section only) and 150 cill



PLEASE NOTE THAT WITH THE 70MM OUTERFRAME THERE IS ONLY 7MM OF COVER ON THE HINGE SIDE SO WE RECOMMEND YOU FIT A 25MM EXTENSION ON THE HINGE SIDE.

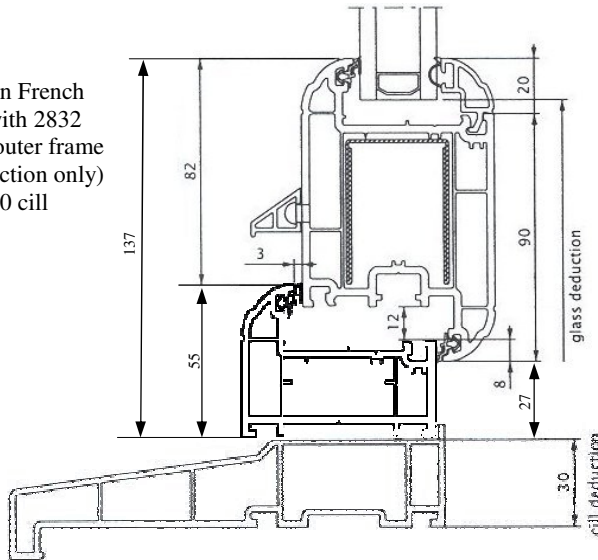

Three way adjustable flag hinge

- Standard Deceuninck 70mm profile in accordance with BS7413
- Manufactured in accordance with BS7412
- Available in White, Rosewood, Rosewood on white, Sherwood, Sherwood on white
- Standard outer frame, **2833** to head and jambs with **2832** to cill section.
- All profiles have low sightline rolled in gasket and weather-seal, **1999**
- Internally beaded sash for both open out and in.
- **2830** open in door sash, **2831** open out door sash
- Standard 28mm scotia bead with co-extruded gasket, **2840**
- Fully welded outer frame, sash and mid rail (mullions mechanically jointed)
- All welded joints are grooved on white and knifed on laminates
- Concealed or face drainage
- Three multi-adjustable flag hinges
- Lever/Lever handles to both doors
- Handle operated top and bottom shoot-bolt locking to both doors
- 4 rollers, 2 hook bolts, 2 anti jemmy bolts, 1 dead latch, 1 soft latch
- One piece keep with adjustable locking points

OPTIONS

- 28mm double glazed sealed units manufactured to EN1279
- Night ventilation facility (*4000mm or 2x4000mm*)
- Low 20mm Aluminium wheel chair threshold
- Panic bar gearing

REINFORCEMENT SPECIFICATION

- Mild galvanised steel to BS 2989
- Outer frame head and cill reinforced if >1500mm
- Outer frame jambs both fully reinforced
- Sash jambs both reinforced