


Fortress 70 - Chamfered Tilt & Turn Window

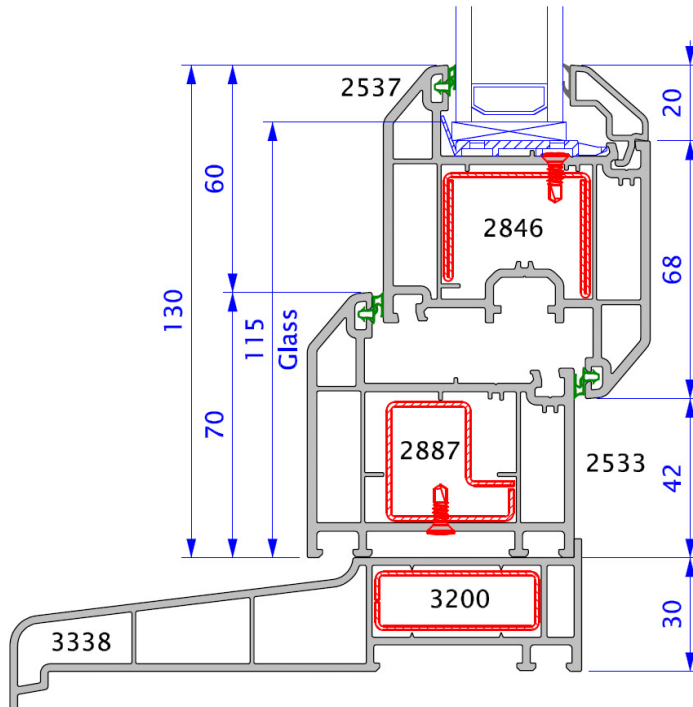

- Standard Deceuninck 70mm profile in accordance with BS7413
- Available in White, Rosewood, Rosewood on white, Sherwood, Sherwood on white
- All profiles have low sightline rolled in gasket and weather-seal, 3299
- Standard chamfered outer frame, **2533**
- Internally beaded chamfered sash, **2537**
- Standard 28mm chamfered bead with co-extruded grey gasket, 2540
- Key locking 'Matrix' locking handles
- Fully welded outer frame, transoms and mullions
- All welded joints are grooved on white and knifed on laminates
- Concealed or face drainage
- Standard face mounted tilt before turn locking mechanism
- Anti slam - mishandling device

OPTIONS

- 28mm double glazed sealed units manufactured to EN1279
- Night ventilation facility (4000mm or 2x4000mm)

REINFORCEMENT SPECIFICATION

- Mild galvanised steel to BS 2989
- Outer frame > 1500mm (unsupported)
- Transom > fully reinforced
- Sashes > 1000mm

All reinforcement (where applicable) is continuous, i.e. pushed through the welds.

Please note that we cannot make combination frames due to not having, 85mm T mullion.