


Super Fortress 70 - Sculpted Casement Window

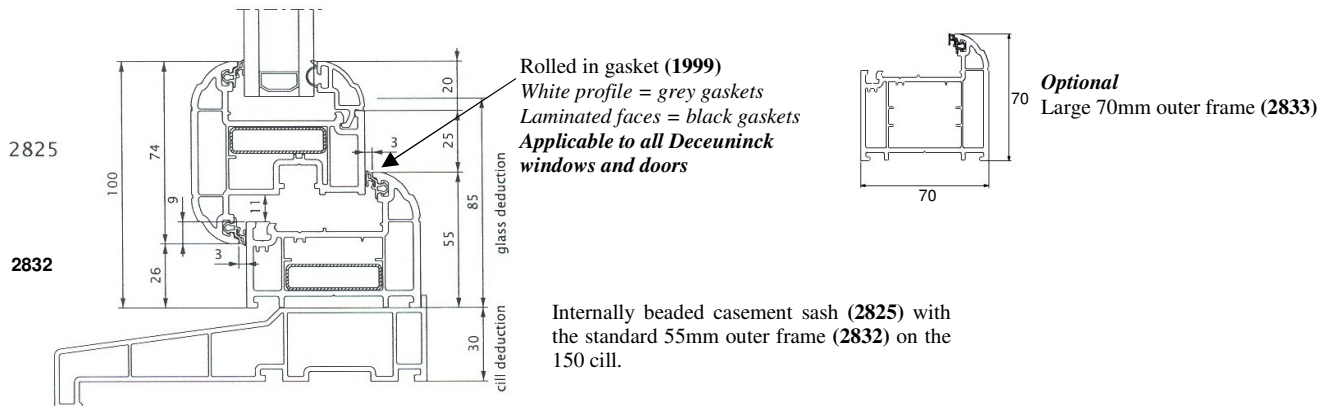

- Standard Deceuninck 70mm profile in accordance with BS7413
- Manufactured in accordance with BS7412
- Available in White, Rosewood, Rosewood on white, Sherwood, Sherwood on white
- All profiles have low sightline rolled in gasket and weather-seal, **1999**
- Standard sculpted outer frame, **2832** (55mm face)
- Internally beaded sculpted sash, **2825** (74mm face)
- Standard 28mm scotia bead with co-extruded gasket, **2840**
- Push button to release 'Matrix' locking handles (35mm spindle)
- Fully welded outer frame transom and mullions
- All welded joints are grooved on white and knifed on laminates
- Concealed or face drainage
- Stainless steel hinges
- Shootbolt locking standard

OPTIONS

- Optional wide sculpted outer frame, **2833** (70mm face)
- Espagnolette locking
- 28mm double glazed sealed units manufactured to EN1279
- Night ventilation facility (4000mm or 2x4000mm)
- Claw locks

REINFORCEMENT SPECIFICATION

- Mild galvanised steel to BS 2989
- Outer frame > 1500mm (unsupported)
- Transom > fully reinforced
- Sashes > 1000mm

All reinforcement (where applicable) is continuous, i.e. pushed through the welds.